



Schur[®]Star 2060-C

Bagging System with numerous options

Flexibility and Efficiency

The entire Schur[®]Star product range has been developed with a view to optimizing the packing process and the finished package, e.g. by optimizing filling conditions which, make the packing process very user-friendly whilst also ensuring high volumes. Additionally, the model 2060-C offers incredible short change-over times and very low waste levels, even when making frequent change overs. The 2060-C model is available for automated or manual filling.


Accessories:

- Supporting conveyor
- Opener/closer, recloseable zipper.
- Base opening unit.
- Filling funnels.
- Air extraction system.
- Compression unit.
- Bag vibrating system.
- System for continuous filling of bags.
- Gas flush unit.
- Sealing system for sealing around handle or euroslot.
- Marking equipment - Thermal transfer, Inkjet or labelling.
- Servo driven

Technical Specifications

Model	Schur®Star 2060-C, Stainless steel AISI 304.
Bag Feeding	Continuous with a pre-selected feeding speed. Intermittently with a pre-selected number of bags per cycle. Automatically with a variable stopping time per cycle for manual or automated filling.
Packaging Speed	Variable bag feeding between 10 and 98 feet/min. (3 and 30 m/min.)
Capacity	Max. 80 bags/min. by continuous operation, depending on bag size and product being filled. Max. 35 bags/min by intermittent operation, depending on bag size and product being filled. One bag being filled at a time.

Bag Change-over	4-5 minutes.
Bag Dimension	Max.: Width 18 inches (450mm), Length 20 inches (500mm). Min.: Width 4 inches (100mm), Length 4 inches (100mm). (Different formats on request).
Power Supply	3 x 480 VAC + 0 + PE, 60Hz, 3,5 kW.
Air Supply	700 kPa, Consumption: 140 l/min. (ANR).
Control System	Allan Brady Compactlogix 1769-L27EMR.
Weight	1433 pounds (650 kg).
Bag Material	PE, CPP, coextruded films and laminates Max.: 0.0055" (0,140 mm) Min.: 0.0016" (0,040 mm).

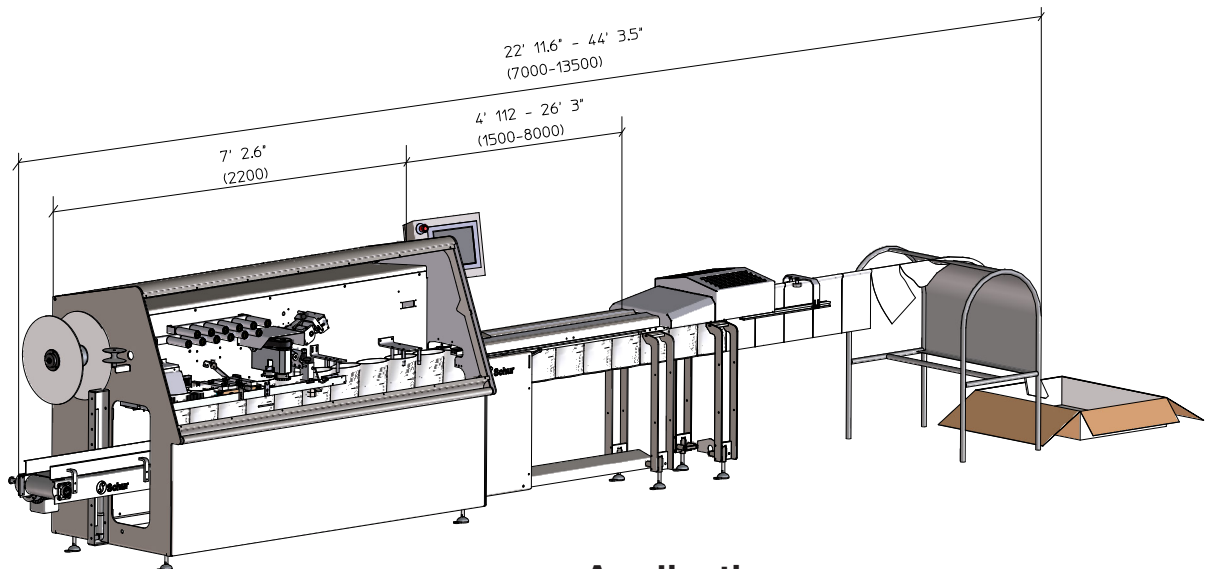

NB: We reserve the right to change technical specifications without notice.

Applications

- Food industry.
- Non-food industry.
- Pharmaceutical industry.
- Chemical industry.
- Small or medium batch productions.
- Medium or high capacity.

